

KINVARO

T-57 lift-up flap fitting



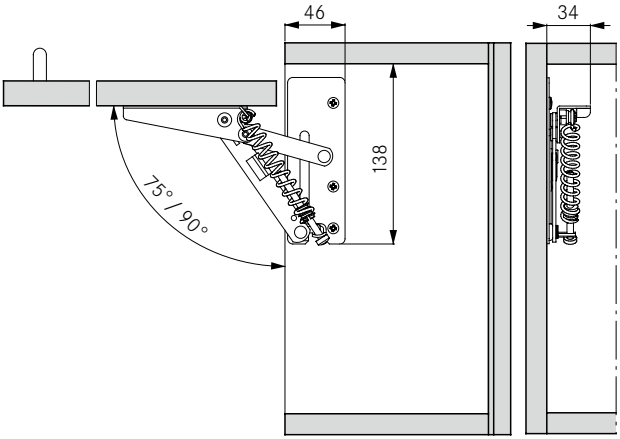
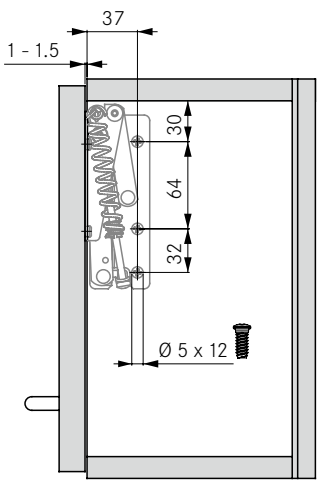
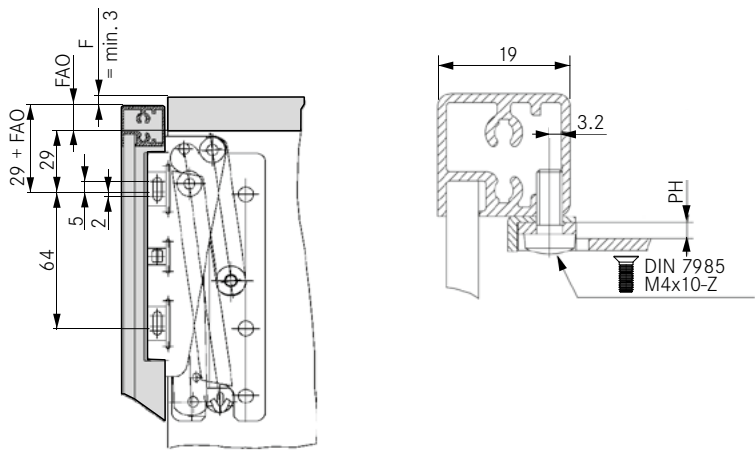
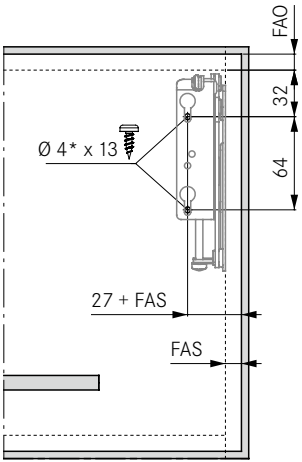
- Opening angle adjustable to 75° or 90°
- Easy to fit
- Adjustable spring force
- Adjustable flap height ± 1.0 mm
- No hinges fitted to the top panel
- Allows additional cabinet installation above
- Can be used for wooden flaps or aluminium frames with glass infill
- Weight 1.0 to 6.2 kg
- Range of flaps:
 - Width: up to 1200 mm
 - Height: 300 – 600 mm
- High-quality finish, nickel-plated

APPLICATION RANGE

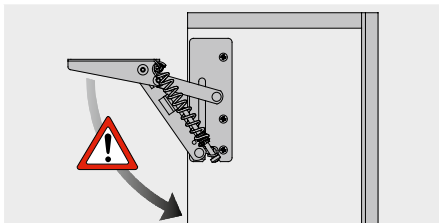
Cabinet height	Flap weight incl. handle	
	min.	max.
300	1.0	6.2
350	1.2	4.9
400	1.4	3.8
450	1.5	3.6
500	1.7	2.9
550	1.9	2.7
600	2.1	2.5

ASSEMBLY AND INSTALLATION INSTRUCTIONS

All dimensions in millimetres

Required space	Side wall drilling positions
	
Front: installation for flaps with standard aluminium frame profiles (19 mm)	Front: installation for wooden and frame flaps (min. 55 mm width)
	 * Pre-drilling required - Ø 2 mm
Calculation of flap weight Flap width x flap height x flap thickness x density¹ + weight of handle² = weight of flap ¹ Densities: MDF 0.85 kg/dm³, chipboard 0.65 kg/dm³, spruce/pine 0.45 kg/dm³ ² For bar handles allow 0.1 kg for each 100 mm handle width. We recommend a trial fitting	

WARNING



Important!
Caution - risk of injury!
Fitting is spring-tensioned!

LEGEND

F Reveal
FAO Front overlay, top
FAS Front overlay, side
PH Stamping height